
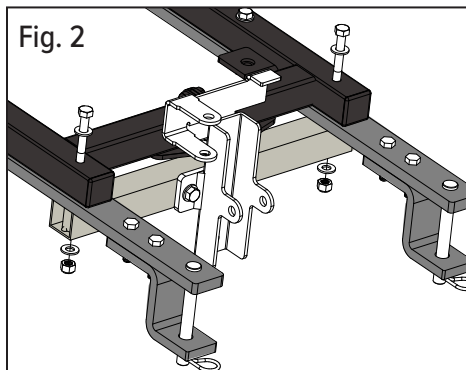


Welcome to your new 3rd Wheel™ Jack Stand. We're going to make this roll easy.


Assembly & Installation

1. Fasten the Tab Bracket to the mounting tube with the 2-inch bolts provided (see Fig. 1). Tighten the bolts securely.
2. Remove the two front bolts which connect your hitch forks to the Cyclone Rake chassis. Then bolt the mounting tube under the hitch forks using the 3.75-inch bolts provided. See Fig. 2. That's it!

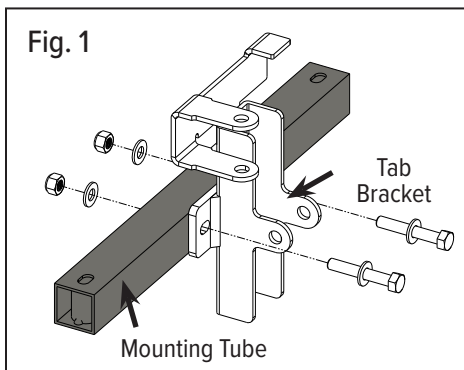



!!! WARNING !!!

Never drive with the jack upright. **Always** stow the jack in the sideways position or remove before driving. It will result in severe damage to your equipment.

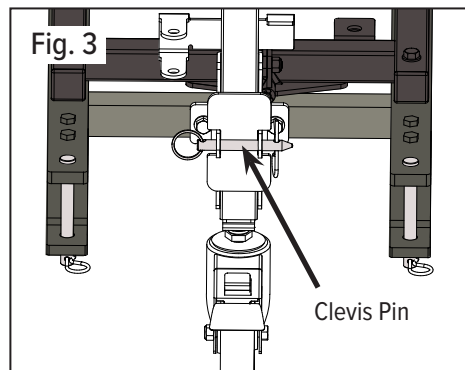

To Use the 3rd Wheel™ Jack Stand

1. Slip the jack in into the tab bracket and secure with the clevis pin as shown in Fig. 3. Be sure to attach the bridge pin for safety.
2. Roll the Cyclone Rake up to your tractor then, using the jack handle, (see Fig. 4) raise or lower the chassis to align the hitch forks with the hitch bar on your tractor. Then install the 2 hitch pins.
3. Use jack handle again to raise the caster wheel until it is off the ground and all the weight is on the hitch bar.
4. Pull out the clevis pin, remove the jack and mount the jack sideways on the top bracket and re-secure it with the clevis pin. (see Fig. 5) **Never drive without first stowing the jack in the sideways position!**
5. When you are done using your Cyclone Rake, remove the jack and re-install it in the upright position. Use the jack handle to lower the caster wheel until all of the weight is off the hitch bar..
6. Remove the hitch pins from your tractor, and roll the Cyclone Rake away.

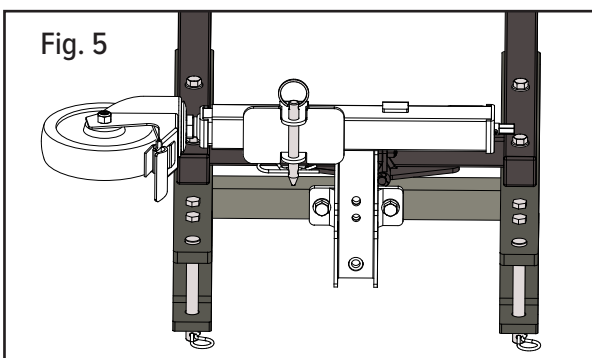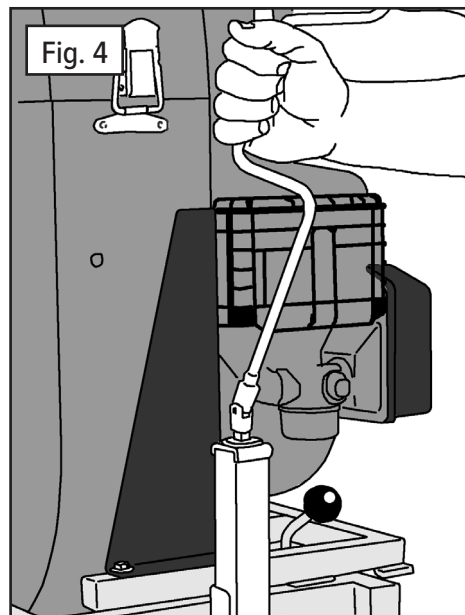

Wear Adjustment: If you ever notice the jack stand start to wobble or show a little wear — no problem. Just tighten up the set screw and that solves it.

